

Description

Coloured standard thermal paper POS applications, with standard sensitivity and good printability for high speed thermal printers. Available in green, blue, pink and yellow. Bisphenol A (BPA) free.

End uses

POS receipts, Coupons, Bank statements

Print methods

Flexo

Certificates

- [PEFC Chain of Custody \(multisite\)](#)
- [FSC Chain of Custody \(multisite\)](#)
- [REACH regulation Lecta](#)
- [ISO 14001 Environment](#)
- [EMAS Leitza mill](#)
- [ISO 50001 Energy Efficiency](#)
- [ISO 9001 Quality](#)
- [ISO 45001 Health and Safety](#)

For applications that require specific certifications or approvals, please contact our sales teams.



Physical Properties

Property	Test Method	Unit	Value	Tolerance
Substance	ISO 536	g/m ²	55	± 4%
		lbs (17x22-500 sheets)	14.6	
Thickness	ISO 534	μm	60	± 5
		mils	2.4	± 0.2
Bekk smoothness	ISO 5627	s	300	≥ 250
Brightness	ISO 2470	%	-	-
Tensile strength CD	ISO 1924-2	kN/m	1.6	-0.5
Tensile strength MD	ISO 1924-2	kN/m	2.8	-1.0

Stability Properties

Property	Conditions	Image Stability	Paper Stability
Heat resistance	60°C, 30% HR, 24h	≥ 65%	≤ 0.15 D.O.
Humidity resistance	40°C, 90% HR, 24h	≥ 90%	≤ 0.15 D.O.
Light resistance	5.000 Lux, 100h	≥ 95%	≤ 0.12 D.O.

Image Sensitivity

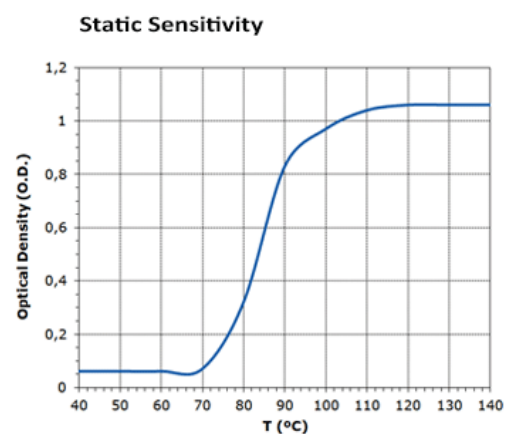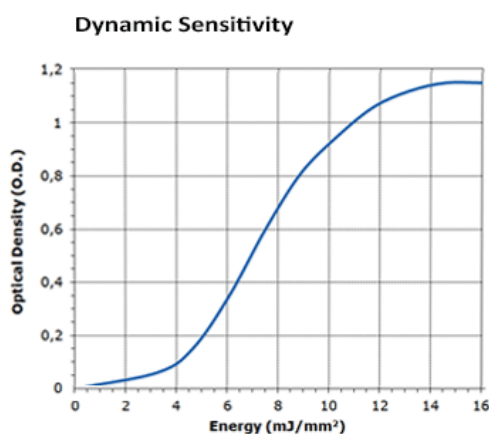

Values are subject to change without notice.
Last update: 02/27/2023